

HIGH SPEED, FLEXIBLE AND SUSTAINABLE A4 MULTIFUNCTION COLOUR DEVICES.

imageFORCE C611 Series

Designed for busy offices and large workgroups that need high volume print and fast scan capability.



MAXIMISE PRODUCTIVITY

Produce a range of output at print speeds of up to 61ppm and scan speeds of 190ipm. Print on small paper sizes, save time with a fast machine warm up time and enable multiple users to print large documents thanks to additional paper capacity options.

ROBUST SECURITY


Security features include multifactor authentication, enhanced username/password protection, FIPS 140-3 network encryption and an improved dual network support. A security settings navigator recommends appropriate settings to protect against information leaks and cyber threats.

SUSTAINABLE

Boost your sustainability efforts with devices that are built with 1% recycled steel, up to 25% recycled plastic, use recyclable cardboard packaging and have a low energy consumption.

USER EXPERIENCE

Easily carry out print and scanning jobs using the intuitive user interface. Quickly reach the most relevant part of the online manual via a QR code and load paper into the high contrast cassette which is designed to be easier to see by people with visual impairment.

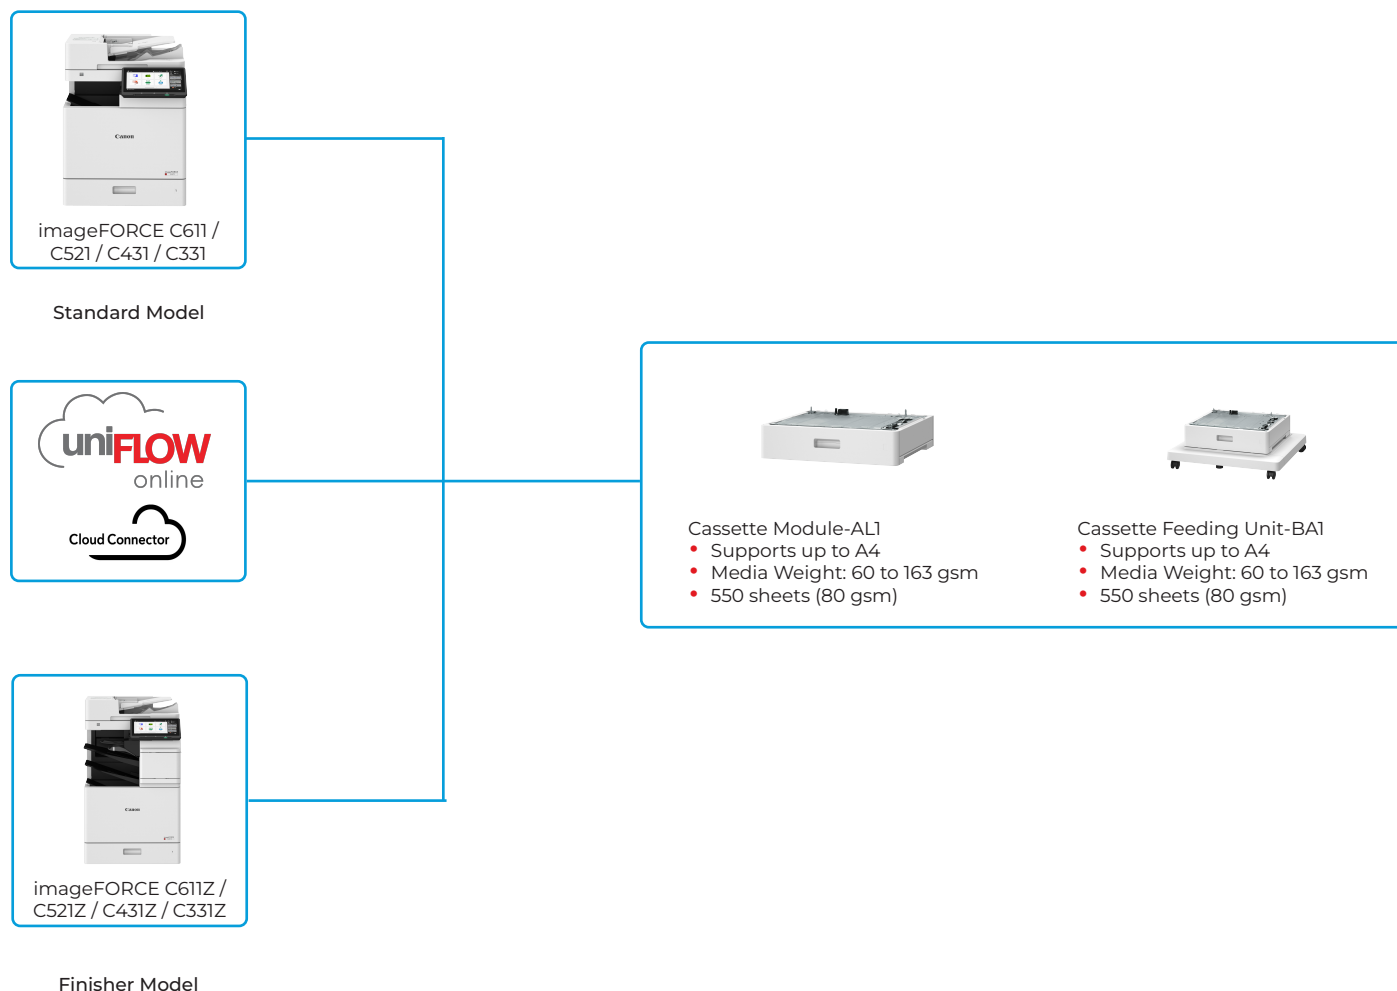

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the [online product configurator](#).

TECHNICAL SPECIFICATIONS

imageFORCE C611 Series

MAIN UNIT	
Machine Type	A4 Color Laser Multifunctional
Core Functions	Print, Copy, Scan, Send, Store and Optional Fax
Processor	1.8GHz Dual Core Processor
Control Panel	10.1" TFT LCD WSVGA Color Touch panel
Memory	RAM: 4.5GB
Storage	SSD(Standard): 256GB
Interface Connection	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T Optional: Wireless LAN (IEEE 802.11a/b/g/n/ac/ax) OTHERS Standard: USB 2.0 (Host) x 1, USB 3.0 (Host) x 1, USB 2.0 (Device) x 1 Optional: Serial Interface, Copy Control Interface
Paper Supply Capacity (A4, 80gsm)	Standard: 650 sheets 100-sheet Multi-purpose tray x 1 550-sheet Paper cassette x 1 Maximum: 2,300 sheets (with 2 x Cassette Module-AL1 + 1 x Cassette Feeding Unit-BA1)
Paper Output Capacity (A4, 80gsm)	Standard model (imageFORCE C611/C521/C431/C331): 400 sheets Finisher model (imageFORCE C611Z/C521Z/C431Z/C331Z): 900 sheets
Finishing Capabilities	Standard model (imageFORCE C611/C521/C431/C331): Collate, Group Finisher Model (imageFORCE C611Z/C521Z/C431Z/C331Z): Collate, Group, Offset*, Staple* *available with upper tray
Supported Media Types	Multi-purpose tray: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Label, Letterhead, Envelope Paper Cassette: Thin, Plain, Recycled, Color, Heavy, Bond, Label, Pre-Punched, Letterhead
Supported Media Sizes	Multi-purpose tray: Standard size: A4, A5, A5R, A6, B5 Custom size: 76.0 x 127.0 mm to 216.0 x 355.6 mm Envelopes: COM10 No.10, Monarch, DL, ISO-C5 Envelope custom size: 76.0 x 127.0 mm to 216.0 x 355.6 mm Paper Cassette: Standard size: A4, A5, A5R, A6, B5 Custom size: 101.6 x 148.0 mm to 216.0 x 355.6 mm
Supported Media Weights	Multi-purpose tray: 60 to 216 gsm Paper Cassette: 60 to 163 gsm Duplex: 60 to 163 gsm

Warm-up Time	Quick Startup Mode: 4 Seconds or less* * Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display. From Power On: 10 seconds or less* * Time from device power-on, until copy ready (not print reservation) From Sleep Mode: 10 Seconds or less
Dimensions (W x D x H)	Standard model (imageFORCE C611/C521/C431/C331): 500 x 620 x 645 mm Finisher model (imageFORCE C611Z/C521Z/C431Z/C331Z): 500 x 620 x 843 mm
Installation Space (W x D)	Standard model / Finisher model: 866 x 847 mm (with left cartridge door & right door open + front cassette open)
Weight*	Standard model (imageFORCE C611/C521/C431/C331): Approx. 47 kg Finisher model (imageFORCE C611Z/C521Z/C431Z/C331Z): Approx. 55 kg
*including regular toner	

PRINT SPECIFICATIONS	
Print Speed (BW and CL)	imageFORCE C611Z/C611 1-sided: Up to 61 ppm (A4), Up to 85 ppm (A5R), Up to 99 ppm (A5), Up to 69 ppm (A6) 2-sided: Up to 61 ppm (A4), Up to 80 ppm (A5R) imageFORCE C521Z/C521 1-sided: Up to 52 ppm (A4), Up to 72 ppm (A5R), Up to 84 ppm (A5), Up to 69 ppm (A6) 2-sided: Up to 52 ppm (A4), Up to 69 ppm (A5R) imageFORCE C431Z/C431 1-sided: Up to 43 ppm (A4), Up to 60 ppm (A5R), Up to 69 ppm (A5, A6) 2-sided: Up to 43 ppm (A4), Up to 52 ppm (A5R) imageFORCE C331Z/C331 1-sided: Up to 33 ppm (A4), Up to 60 ppm (A5R), Up to 69 ppm (A5, A6) 2-sided: Up to 33 ppm (A4), Up to 52 ppm (A5R)
Print Resolution (dpi)	Up to 1,200 x 1,200
Page Description Languages	Standard: UFR II, PCL6/PCL5, Adobe® PostScript®3™
Direct Print	Supported file types: PDF, EPS, TIFF/JPEG, and XPS

TECHNICAL SPECIFICATIONS

imageFORCE C611 Series

Printing From Mobile And Cloud	AirPrint, Mopria, IPP Everywhere, Canon PRINT, uniFLOW Online, Universal Print and Cloud Connector A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information.
OS Standard Printing	Android/Windows® 10/Windows® 11/Chrome OS/macOS (11.2.2 or later) /iOS (15.2 or later)/iPadOS
Fonts	PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T* ¹ (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts* ² * ¹ Optional PCL International Font Set-A1 is required. * ² Optional Barcode Printing Kit-D1 is required.
Print Features	Secured Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/Orientations, Front/Back Covers, Toner Reduction, Poster Printing, Forced Hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer
Operating System	UFR II: Windows® 10/11/Server2016/Server2019/Server2022/Server2025, macOS (10.14 or later) PCL: Windows® 10/11/Server2016/Server2019/Server2022/Server2025 PS: Windows® 10/11/Server2016/Server2019/Server2022/Server2025, macOS (10.14 or later) PPD: Windows® 10/11, macOS (10.15 or later) As of June 2025

COPY SPECIFICATIONS	
Copy Speed (BW and CL)	imageFORCE C611Z/C611 1-sided: Up to 61 ppm (A4), Up to 85 ppm (A5R), Up to 99 ppm (A5), Up to 69 ppm (A6) 2-sided: Up to 61 ppm (A4), Up to 80 ppm (A5R) imageFORCE C521Z/C521 1-sided: Up to 52 ppm (A4), Up to 72 ppm (A5R), Up to 84 ppm (A5) Up to 69 ppm (A6) 2-sided: Up to 52 ppm (A4), Up to 69 ppm (A5R) imageFORCE C431Z/C431 1-sided: Up to 43 ppm (A4), Up to 60 ppm (A5R), Up to 69 ppm (A5, A6) 2-sided: Up to 43 ppm (A4), Up to 52 ppm (A5R) imageFORCE C331Z/C331 1-sided: Up to 33 ppm (A4), Up to 60 ppm (A5R), Up to 69 ppm (A5, A6) 2-sided: Up to 33 ppm (A4), Up to 52 ppm (A5R)
First-Copy-Out Time (A4, BW/CL)	imageFORCE C611Z/C611 Approx. 4.3/4.7 seconds or less imageFORCE C521Z/C521 Approx. 5.0/5.4 seconds or less imageFORCE C431Z/C431 Approx. 5.7/6.3 seconds or less imageFORCE C331Z/C331 Approx. 5.7/6.3 seconds or less
Copy Resolution (dpi)	600 x 600
Multiple Copies	Up to 999 copies
Copy Density	Automatic or Manual (9 Levels)
Magnification	Variable zoom: 25% to 400% (1% Increments)
Copy Features	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Two-sided Original, Job Build, N on 1, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Copy ID Card, Skip Blank Pages, Color Mode, Reserved copy, Copy Sample

SCAN SPECIFICATIONS	
Type	Single-pass Duplexing Automatic Document Feeder* [2-sided to 2-sided (Automatic)] * Detect Feeder Multi Sheet Feed is supported.

TECHNICAL SPECIFICATIONS

imageFORCE C611 Series

Document Feeder Paper Capacity (80 gsm)	Up to 100 sheets
Document Feeder acceptable paper weight	Document Feeder media weight: 1-sided scanning: 42 to 128 gsm (BW), 64 to 128 gsm (CL) 2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL) Note: Business card: 80 to 220 gsm Original width narrower than A6 except business card: 50 to 128 gsm Long Original(over than 355.6mm): 60 to 90gsm
Supported media sizes	Platen scanning size: up to 216.0 x 355.6 mm Document Feeder media size: A4, A5R, A6, B5 Custom size: 48.0 x 128.0 mm to 216.0 x 355.6 mm Business card: 48.0 x 85.0 mm to 55.0 x 91.0 mm
Scan Speed (ipm: A4)	Send (300 x 300 dpi): Automatic Colour Select "OFF": 1-sided Scanning: 95 2-sided Scanning: 190 Automatic Colour Select "ON": 1-sided Scanning: 50 2-sided Scanning: 100 Copy: Scan Speed Priority (300x600dpi: default) 1-sided Scanning: 50 2-sided Scanning: 100 Image Quality Priority (600x600dpi) 1-sided Scanning: 30 2-sided Scanning: 50
Scan Resolution (dpi)	600 x 600
Pull Scan Specifications	Colour Network ScanGear2 for both TWAIN and WIA Supported OS: Windows® 10/11/Server 2016/Server 2019/Server 2022/Server 2025
Scan Method	Push Scan, Pull Scan, Scan to Box, Scan to Advanced Space, Scan to Network, Scan to USB Memory Key, Scan to Mobile devices, Scan to cloud (uniFLOW Online)

SEND SPECIFICATIONS

Destination	Standard: E-mail/Internet FAX (SMTP*), SMB, FTP, WebDAV, Mail Box Optional: Super G3 FAX, IP Fax *OAuth 2.0 authentication method is available for Microsoft 365 and Google Workspace
--------------------	---

Address Book	LDAP (2,000)/Local (1,600)/Speed dial (200)
Communication Protocol	File: FTP (TCP/IP), SMB3.1.1 (TCP/IP), WebDAV E-mail/I-Fax: SMTP, POP3
File Format	TIFF (MMR), JPEG, PDF (Compact, Searchable, Optimize for Web, PDF/A-1b, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS (Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word)
Universal Send Features	Original Type Selection, Two-sided Original, Density Adjustment, Sharpness, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Originals

FAX SPECIFICATIONS

Maximum Number of Connection Lines	1
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps
Compression Method	MH, MR, MMR, JBIG
Resolution (Dpi)	400x400 (Ultra Fine), 200x400 (Super Fine), 200x200 (Fine), 200x100 (Normal)
Sending/Receiving Size	Sending: A4, A5R*, A6*, B5* Receiving: A4, A5, A5R, B5 *Sent as A4
Fax Memory	Up to 30,000 pages (2,000 jobs)
Speed Dials	Max. 200
Group Dials/Destinations	Max. 199 dials
Sequential Broadcast	Max. 256 addresses
Memory Backup	Yes
Fax Features	Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log

TECHNICAL SPECIFICATIONS

imageFORCE C611 Series

STORE SPECIFICATIONS	
Mail Box (Number supported)	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes Maximum 10,000 Pages (2,000 jobs) Stored
Advanced Space	Communication Protocol: SMB or WebDAV Supported Client PC: Windows® 10/11 Concurrent Connections (Max.): SMB:64, WebDAV:3
Advanced Space Available Disc Space	Standard: 16 GB
Advanced Space Features	Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, Search, File Preview, Authentication Management, Open to public, URI TX, Backup/Restore

SECURITY SPECIFICATIONS	
Authentication And Access Control	User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online/uniFLOW™ (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Microsoft Entra ID Authentication (Password Login, Card Login), Two-Factor Authentication at LUI/RUI, Access Management System (Access Control) *1 Optional
Document Security	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print™), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS), BOX Security (Mail Box Password Protected, Advanced Space Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/ File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Secure Watermark *1 Optional

Network Security	TLS 1.3 (FIPS140-3), IPsec (FIPS140-3), IEEE802.1X authentication, SNMPv3, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), WPA3 support (Wi-Fi), Enabling/Disabling (Network Applications, Remote UI, USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Prohibit the execution of files stored in Advanced Space in the MFP, Scan and Send -Virus Concerns for E-mail Reception
Device Security	Protecting SSD Data [SSD Data Encryption (FIPS140-3), SSD Lock], Standard SSD Initialize, Initialize (NIST 800-88 PURGE LEVEL), Trusted Platform Module (TPM 2.0), Job Log Conceal Function, Protecting MFP Software Integrity: Verify System at Startup (NIST SP800-193: Protection), Checking MFP Software Integrity & Platform Firmware Resiliency: Automatic System Recovery (NIST SP800-193: Recovery), Runtime Intrusion Detection: Trellix Embedded Control, HCD-PP Common Criteria Certification (Pending Confirmation)
Device Management and Auditing	Administrator Password, Digital Certificate And Key Management, SAN certificates, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Image Data Logging, Security Policy Setting

ENVIRONMENTAL SPECIFICATIONS	
Operating Environment	Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity/No condensation)
Power Source	220-240V, 50/60Hz, 4.9A
Power Consumption	Maximum: Approx. 1,760 W Copy mode (ADF continuation copying): 838 W* Standby: 46 W* Sleep mode: Approx. 0.8 W* *1 Reference value: measured one unit *2 0.8 W is not available in all circumstances due to certain settings Typical Electrical Consumption (TEC)* imageFORCE C611 / C611Z 0.60 kWh imageFORCE C521 / C521Z 0.49 kWh imageFORCE C431 / C431Z 0.39 kWh imageFORCE C331 / C331Z 0.34 kWh As per USA Energy Star 3.2

TECHNICAL SPECIFICATIONS

imageFORCE C611 Series

Noise Levels	Sound Power Level (LWA,m)* Active (BW)(1-sided): imageFORCE C611: 67dB, Kv 3dB imageFORCE C611Z: 66dB, Kv 3dB imageFORCE C521: 65dB, Kv 3dB imageFORCE C521Z: 66dB, Kv 3dB imageFORCE C431: 64dB, Kv 3dB imageFORCE C431Z: 64dB, Kv 3dB imageFORCE C331: 63dB, Kv 3dB imageFORCE C331Z: 63dB, Kv 3dB Sound Pressure (LpAm)* Bystander's position: Active(BW/CL)(1-sided): imageFORCE C611: 53dB/54dB imageFORCE C611Z: 53dB/53dB imageFORCE C521: 51dB/51dB imageFORCE C521Z: 51dB/52dB imageFORCE C431: 50dB/50dB imageFORCE C431Z: 50dB/50dB imageFORCE C331: 49dB/50dB imageFORCE C331Z: 50dB/50dB Stand-by: imageFORCE C611: 20dB* imageFORCE C611Z: 19dB* imageFORCE C521: 19dB* imageFORCE C521Z: 17dB* imageFORCE C431: 19dB* imageFORCE C431Z: 17dB* imageFORCE C331: 20dB* imageFORCE C331Z: 17dB* *Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)
Standards	Blue Angel (Validation Pending)
CONSUMABLES	
Toner Cartridges	Toner 1006 BK/C/M/Y Toner 1006 L BK/C/M/Y
Toner Cartridge yield in accordance with ISO/IEC 19798	Toner 1006 C/M/Y: 27,800 pages Toner 1006 BK: 29,700 pages Toner 1006L C/M/Y: 5,900 pages Toner 1006L BK: 8,600 pages
SOFTWARE AND PRINTER MANAGEMENT	
Tracking & Reporting	uniFLOW Online
Remote Management Tools	iW Enterprise Management Console Remote Distribution & Management Service Monitoring Service
Scanning software	Color Network ScanGear 2
Optimisation tools	Canon Driver Configuration Tool
Platform	MEAP (Multifunctional Embedded Application Platform)

PAPER SUPPLY OPTIONS	
Cassette Module-AL1	Paper Capacity: 550 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Color, Heavy, Bond, Label, Pre-Punched, Letterhead Paper Size: A4, A5, A5R, A6, B5 Custom size: 101.6 x 148.0 mm to 216.0 x 355.6 mm Paper Weight: 60 to 163 gsm
Cassette Feeding Unit-BA1	Paper Capacity: 550 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Color, Heavy, Bond, Label, Pre-Punched, Letterhead Paper Size: A4, A5, A5R, A6, B5 Custom size: 101.6 x 148.0 mm to 216.0 to 355.6 mm Paper Weight: 60 to 163 gsm
OUTPUT FEATURES*	
Inner Finisher (only Finisher Model)	Tray Capacity (with 80 gsm paper/same paper type): Upper Tray: A4, A5R, B5: 400 sheets Lower Tray: A4, A5R, B5: 100 sheets Paper Weight: 60 to 163 gsm Staple Position: Corner Staple Capacity: A4: 50 sheets (60 to 74 gsm) 40 sheets (75 to 90 gsm) 20 sheets (91 to 120 gsm) *Paper capacity may vary with different paper type/size.
HARDWARE ACCESSORIES	
Card Readers	IC Card Reader Box-D2 Various card readers are available, please contact local Canon Office for more details.
Others	Plain Pedestal Type-AC1 Plain Pedestal Type-AD1
SYSTEM & CONTROLLER OPTIONS	
Print Accessories	PCL International Font Set-A1
Barcode Printing	Barcode Printing Kit-D1
System Accessories	Copy Control Interface Kit-A1 Wireless LAN Board-H1 Wireless LAN 5GHz License-A1 Wireless LAN Attachment Kit-B1
Fax Accessories	Super G3 FAX Board-BM1 Remote Fax Kit-A1 IP FAX Expansion Kit-B1
OTHER OPTIONS	
Accessibility Accessories	ADF Access Handle-A1
Consumables	Staple-P1

imageFORCE C611 Series



Certifications and compatibility



Canon

Canon UK Ltd.
4 Roundwood
Avenue
Stockley Park
Uxbridge
UB11 1AF
canon.co.uk

Canon Ireland Ltd.
3090 Lake Drive
Citywest Business Campus
Saggart, Co. Dublin
D24 XN47
canon.ie